



When the System Program Switch on the KX-T61610B is set to the PROGRAM position, the operation of the KX-T7030 and the KX-T7130 connected to extension 11 will change as follows.

**KX-T7030**

ที อี เอ็น พีเอบีเอ็กซ์ / TeN PABX  
 51/500 หมู่บ้านเสนา 88 ซอย 9 ซอยนวลจันทร์ 17 แขวงนวลจันทร์  
 เขตปทุมธานี กรุงเทพฯ 10240  
 บริการ / สอบถาม / แจ้งซ่อม: Hotline: 089-1454237  
 E-mail: tawintra.kawintra@gmail.com www.tenpabx.com

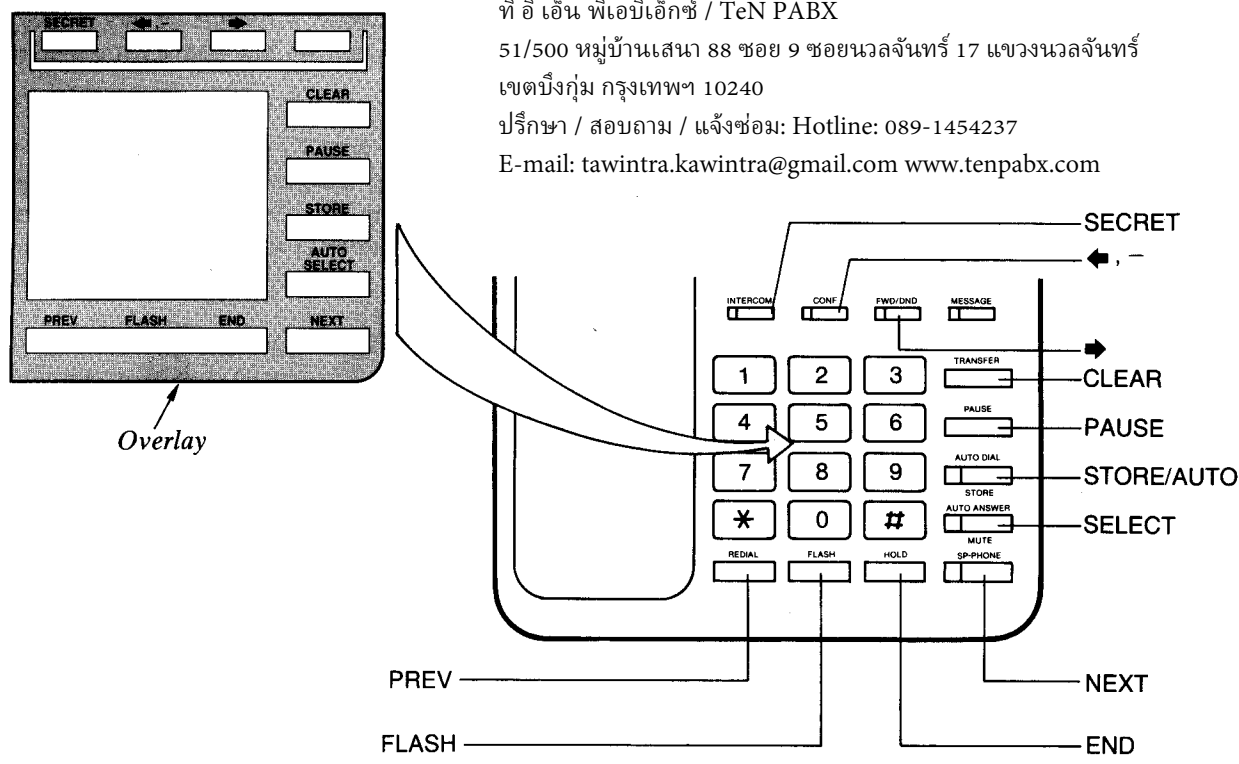

**KX-T7130**

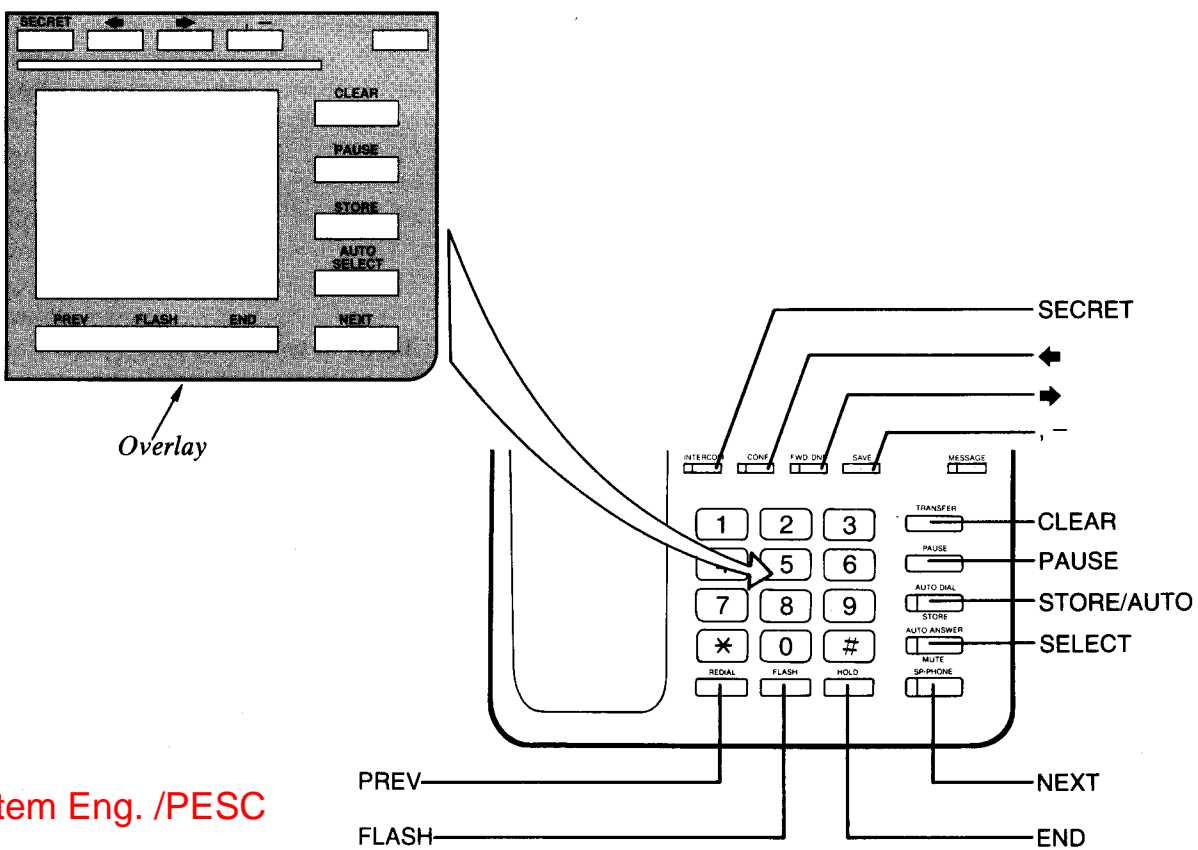

<b>TO SET</b>	<b>PROGRAM ADDRESS</b>	<b>STEPS REQUIRED TO CHANGE PROGRAM</b>																																																																																																																																																
Date and Time Setting	[00]	[A] [⇐] [SELECT] [⇒] [B] [⇐] [SELECT] [⇒] [C] [⇐] [D] [⇐] [SELECT] [MEMORY] [END] year      month      day                                hour      minute      AM/PM day of the week																																																																																																																																																
System Speed Calling Entry	[01] or [AUTO]	[AB] [CD] [phone number] [MEMORY] [9]: automatic line access number [81] through [86]: outside line access number speed access code (00 through 99)																																																																																																																																																
System Speed Dialing—Class Assignment	[02]	[SELECT] [MEMORY] [END] until the desired boundary class appears																																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Default</th> <th>To make a change</th> </tr> </thead> <tbody> <tr> <td>CLASS 1</td> <td>×</td> <td></td> </tr> <tr> <td>CLASS 2</td> <td></td> <td></td> </tr> <tr> <td>CLASS 3</td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make a change	CLASS 1	×		CLASS 2			CLASS 3																																																																																																																																						
	Default	To make a change																																																																																																																																																
CLASS 1	×																																																																																																																																																	
CLASS 2																																																																																																																																																		
CLASS 3																																																																																																																																																		
DSS Console Assignment	[03]	[AB] [⇐] [CD] [⇐] [EF] [⇐] [GH] [MEMORY] [END] Telephone extension number paired with console 2 Console 2 extension number Telephone extension number paired with console 1 Console 1 extension number																																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Console 1</th> <th>Telephone paired with console 1</th> </tr> </thead> <tbody> <tr> <td>Extension number</td> <td></td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th></th> <th>Console 2</th> <th>Telephone paired with console 2</th> </tr> </thead> <tbody> <tr> <td>Extension number</td> <td></td> <td></td> </tr> </tbody> </table>		Console 1	Telephone paired with console 1	Extension number				Console 2	Telephone paired with console 2	Extension number																																																																																																																																						
	Console 1	Telephone paired with console 1																																																																																																																																																
Extension number																																																																																																																																																		
	Console 2	Telephone paired with console 2																																																																																																																																																
Extension number																																																																																																																																																		
Dial Mode (Tone/Pulse) Selection	[04]	[NEXT] [SELECT] [MEMORY] [END] TONE/PULSE until the desired CO number appears																																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="6">To make program change</th> </tr> </thead> <tbody> <tr> <td>CO(s)</td> <td>all CO's</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> </tr> <tr> <td>Pulse mode</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Tone (DTMF) mode</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change						CO(s)	all CO's	1	2	3	4	5	6	Pulse mode	×							Tone (DTMF) mode																																																																																																																							
	Default	To make program change																																																																																																																																																
CO(s)	all CO's	1	2	3	4	5	6																																																																																																																																											
Pulse mode	×																																																																																																																																																	
Tone (DTMF) mode																																																																																																																																																		
Switching Mode (Day/Night Service)	[05]	[SELECT] [MEMORY] [END] MAN/AUTO																																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Default</th> <th>To make program change</th> </tr> </thead> <tbody> <tr> <td>Manual</td> <td>×</td> <td></td> </tr> <tr> <td>Automatic</td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change	Manual	×		Automatic																																																																																																																																									
	Default	To make program change																																																																																																																																																
Manual	×																																																																																																																																																	
Automatic																																																																																																																																																		
Starting Time (Day/Night Service)	[06]	[A] [⇐] [B] [⇐] [SELECT] [MEMORY] [NEXT] [C] [⇐] [D] [⇐] [SELECT] [MEMORY] [END] minute      AM/PM                                minute      AM/PM starting time for day service (hour)                starting time for night service (hour)																																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Default</th> <th>To make program change</th> </tr> </thead> <tbody> <tr> <td>Day plan</td> <td>9:00 AM</td> <td></td> </tr> <tr> <td>Night plan</td> <td>5:00 PM</td> <td></td> </tr> </tbody> </table>		Default	To make program change	Day plan	9:00 AM		Night plan	5:00 PM																																																																																																																																								
	Default	To make program change																																																																																																																																																
Day plan	9:00 AM																																																																																																																																																	
Night plan	5:00 PM																																																																																																																																																	
Flexible Day Outward Dialing Assignment	[07]	[NEXT] [C...H] [MEMORY] [END] CO number until the desired extension number appears																																																																																																																																																
		<table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>CO 1</td> <td>×</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 2</td> <td>×</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 3</td> <td>×</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 4</td> <td>×</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 5</td> <td>×</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 6</td> <td>×</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	CO 1	×																	CO 2	×																	CO 3	×																	CO 4	×																	CO 5	×																	CO 6	×																
	Default	To make program change																																																																																																																																																
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																																																																																																	
CO 1	×																																																																																																																																																	
CO 2	×																																																																																																																																																	
CO 3	×																																																																																																																																																	
CO 4	×																																																																																																																																																	
CO 5	×																																																																																																																																																	
CO 6	×																																																																																																																																																	







**TO SET**

PROGRAM ADDRESS

**STEPS REQUIRED TO CHANGE PROGRAM**

Duration Time  
Count Start Mode

[23]

[SELECT] [MEMORY] [END]

..... INSTANTLY/5S AFTER DIAL/10S AFTER DIAL

	Default	To make program change
Instantly		
5S after dial	×	
10S after dial		

SMDR  
Communication  
Parameters

[24]

(Carriage return for a new line)

[SELECT] [MEMORY]

..... CR+LF/CR

	Default	To make program change
CR+LF	×	
CR		

(Baud rate)

[NEXT] [SELECT] [MEMORY]

..... 110B/150B/300B/600B/1200B/2400B/4800B/9600B

	110B	150B	300B	600B	1200B	2400B	4800B	9600B
Default					×			
To make program change								

(Word length)

[NEXT] [SELECT] [MEMORY]

..... 7 BITS/8 BITS

	Default	To make program change
7 BITS	×	
8 BITS		

(Parity)

[NEXT] [SELECT] [MEMORY]

..... NONE/MARK/SPACE/EVEN/ODD

	None	Mark	Space	Even	Odd
Default		×			
To make program change					

(Stop bit length)

[NEXT] [SELECT] [MEMORY]

..... 1 BIT/2 BITS

	Default	To make program change
1 BIT	×	
2 BITS		

(Page length)

[NEXT] [AB] [MEMORY]

..... 4 through 99 lines

	Default	To make program change
Lines per page	66	

(Skip perforation)

[NEXT] [AB] [MEMORY] [END]

..... 0 through 95 lines

	Default	To make program change
Skipping lines	0	

System Data Dump

[25]

• START OUTPUT  
[MEMORY] [END]  
..... START

• STOP OUTPUT  
[SELECT] [MEMORY] [END]  
..... until the STOP appears

# TO SET

PROGRAM ADDRESS

# STEPS REQUIRED TO CHANGE PROGRAM

[26] [SELECT] [MEMORY] [NEXT] [SELECT] [MEMORY] [END]  
 -----OUTGOING: ON/OFF -----INCOMING: ON/OFF

	Outgoing		Incoming	
	ON	OFF	ON	OFF
Default	×		×	
To make program change				

[27] [NEXT] [SELECT] [MEMORY] [END]  
 -----AUTO ANSWER/MAN ANSWER  
 -----until the desired extension number appears

	Default	To make program change															
	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
Extensions																	
Automatic	×																
Manual																	

[28] [SELECT] [MEMORY] [END]  
 ----- 30SEC/1 MIN/2 MIN/3 MIN/4 MIN/5 MIN/DISABLE

	30 seconds	1 minute	2 minutes	3 minutes	4 minutes	5 minutes	Disable
Default	×						
To make program change							

[29] [SELECT] [MEMORY] [END]  
 ----- ENABLE/DISABLE

	Default	To make program change
Enable	×	
Disable		

[30] [SELECT] [MEMORY] [END]  
 ----- NO SECRET/SECRET

	Default	To make program change
No secret	×	
Secret		

[31] [NEXT] [SELECT] [MEMORY] [END]  
 ----- 300 MS/600 MS/900 MS  
 -----until the desired CO number appears

	Default	To make program change					
CO(s)	all CO's	1	2	3	4	5	6
300 msec							
600 msec	×						
900 msec							

[32] [NEXT] [SELECT] [MEMORY] [END]  
 ----- 1.5 SEC/4.0 SEC  
 -----until the desired CO number appears

	Default	To make program change					
CO(s)	all CO's	1	2	3	4	5	6
1.5 sec	×						
4.0 sec							

[33] [NEXT] [SELECT] [MEMORY] [END]  
 ----- ENABLE/DISABLE  
 -----until the desired CO number appears

	Default	To make program change					
CO(s)	all CO's	1	2	3	4	5	6
Enable	×						
Disable							

# TO SET

PROGRAM ADDRESS

# STEPS REQUIRED TO CHANGE PROGRAM

DSS Button Mode	[34]	<p>[SELECT] [MEMORY] [END]            -----WITHOUT TRANSFER/WITH TRANSFER</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>Without transfer</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>With transfer</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		Without transfer	x			With transfer																																																															
	Default	To make program change																																																																								
Without transfer	x																																																																									
With transfer																																																																										
DTMF Receiver Check	[35]	<p>[NEXT] [SELECT] [MEMORY] [END]            -----ENABLE/DISABLE            -----until the desired DTMF receiver appears</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>DTMF receiver</td> <td style="text-align: center;">1, 2</td> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> </tr> <tr> <td>Enable</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		DTMF receiver	1, 2	1	2	Enable	x			Disable																																																											
	Default	To make program change																																																																								
DTMF receiver	1, 2	1	2																																																																							
Enable	x																																																																									
Disable																																																																										
Transfer Recall Time	[36]	<p>[SELECT] [MEMORY] [END]            -----30 SEC/2 MIN</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>30 seconds</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>2 minutes</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		30 seconds	x			2 minutes																																																															
	Default	To make program change																																																																								
30 seconds	x																																																																									
2 minutes																																																																										
Standard Telephone Connection with Proprietary Telephone	[37]	<p>[NEXT] [SELECT] [MEMORY] [END]            -----ENABLE/DISABLE            -----until the desired extension number appears</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Enable</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Disable</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Enable																		Disable	x																
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Enable																																																																										
Disable	x																																																																									
FI/SAVE Selection	[38]	<p>[NEXT] [SELECT] [MEMORY] [END]            -----FEATURE KEY/SAVE KEY            -----until the desired extension number appears</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Feature key</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Save key</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Feature key	x																	Save key																	
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Feature key	x																																																																									
Save key																																																																										
F3/FWD Selection	[39]	<p>[NEXT] [SELECT] [MEMORY] [END]            -----FEATURE KEY/FWD, DND KEY            -----until the desired extension number appears</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Feature key</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>FWD/DND key</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Feature key	x																	FWD/DND key																	
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Feature key	x																																																																									
FWD/DND key																																																																										
Programmable Executive Override	[40]	<p>[NEXT] [SELECT] [MEMORY] [END]            -----ENABLE/DISABLE            -----until the desired mode appears</p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Disable</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Enable</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Disable	x																	Enable																	
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Disable	x																																																																									
Enable																																																																										



<b>TO SET</b>	<b>PROGRAM ADDRESS</b>	<b>STEPS REQUIRED TO CHANGE PROGRAM</b>																																																																																																																																																
Automatic Designated CO Line Access	[41]	<p>   <b>[NEXT] [C...H] [MEMORY] [END]</b>            ----- dial the CO number            ----- until the desired extension number appears         </p> <table border="1" data-bbox="375 227 1405 461"> <thead> <tr> <th></th> <th><b>Default</b></th> <th colspan="16"><b>To make program change</b></th> </tr> <tr> <th><b>Extensions</b></th> <th><b>all extensions</b></th> <th>11</th><th>12</th><th>13</th><th>14</th><th>15</th><th>16</th><th>17</th><th>18</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th><th>24</th><th>25</th><th>26</th> </tr> </thead> <tbody> <tr><td>CO 1</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>CO 2</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>CO 3</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>CO 4</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>CO 5</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>CO 6</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>		<b>Default</b>	<b>To make program change</b>																<b>Extensions</b>	<b>all extensions</b>	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	CO 1	x																	CO 2	x																	CO 3	x																	CO 4	x																	CO 5	x																	CO 6	x																
	<b>Default</b>	<b>To make program change</b>																																																																																																																																																
<b>Extensions</b>	<b>all extensions</b>	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																																																																																																	
CO 1	x																																																																																																																																																	
CO 2	x																																																																																																																																																	
CO 3	x																																																																																																																																																	
CO 4	x																																																																																																																																																	
CO 5	x																																																																																																																																																	
CO 6	x																																																																																																																																																	
Programmable Call Waiting Tone	[42]	<p>   <b>[NEXT] [SELECT] [MEMORY] [END]</b>            ----- TONE 1/TONE 2            ----- until the desired extension number appears         </p> <table border="1" data-bbox="375 606 1405 725"> <thead> <tr> <th></th> <th><b>Default</b></th> <th colspan="16"><b>To make program change</b></th> </tr> <tr> <th><b>Extensions</b></th> <th><b>all extensions</b></th> <th>11</th><th>12</th><th>13</th><th>14</th><th>15</th><th>16</th><th>17</th><th>18</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th><th>24</th><th>25</th><th>26</th> </tr> </thead> <tbody> <tr><td>Tone 1</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Tone 2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>		<b>Default</b>	<b>To make program change</b>																<b>Extensions</b>	<b>all extensions</b>	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Tone 1	x																	Tone 2																																																																																									
	<b>Default</b>	<b>To make program change</b>																																																																																																																																																
<b>Extensions</b>	<b>all extensions</b>	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																																																																																																	
Tone 1	x																																																																																																																																																	
Tone 2																																																																																																																																																		
Selectable Call-on-Hold Music Source	[44]	<p> <b>[SELECT] [MEMORY] [END]</b>  <b>INTERNAL/EXTERNAL</b> </p> <table border="1" data-bbox="375 833 1193 927"> <thead> <tr> <th></th> <th><b>Default</b></th> <th><b>To make program change</b></th> </tr> </thead> <tbody> <tr><td>Internal</td><td>x</td><td></td></tr> <tr><td>External</td><td></td><td></td></tr> </tbody> </table>		<b>Default</b>	<b>To make program change</b>	Internal	x		External																																																																																																																																									
	<b>Default</b>	<b>To make program change</b>																																																																																																																																																
Internal	x																																																																																																																																																	
External																																																																																																																																																		

● Program Address number [43] does not work with your EMSS Control Unit.