

When the System Program Switch on the KX-T30810B is set to the PROGRAM position, the operation of the KX-T7030 and the KX-T7130 will change as follows.


KX-T7030

ที อี เอ็น พีเอบีเอ็กซ์ / TeN PABX


51/500 หมู่บ้านเสนา 88 ซอย 9 ซอยนวลจันทร์ 17 แขวงนวลจันทร์ เขตบึงกุ่ม กรุงเทพฯ 10240

บริการ / สอบถาม / แจ้งซ่อม: Hotline: 089-1454237


E-mail: tawintra.kawintra@gmail.com www.tenpabx.com

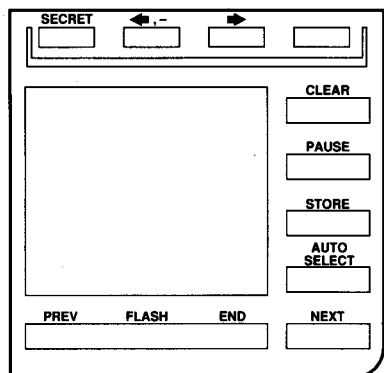


Overlay

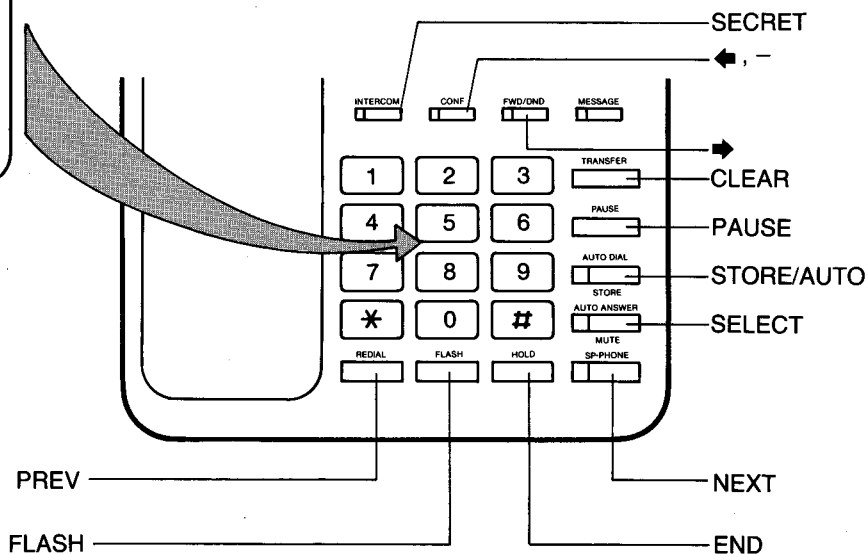

KX-T7130

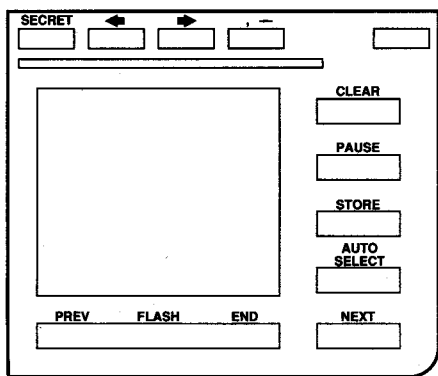

Overlay

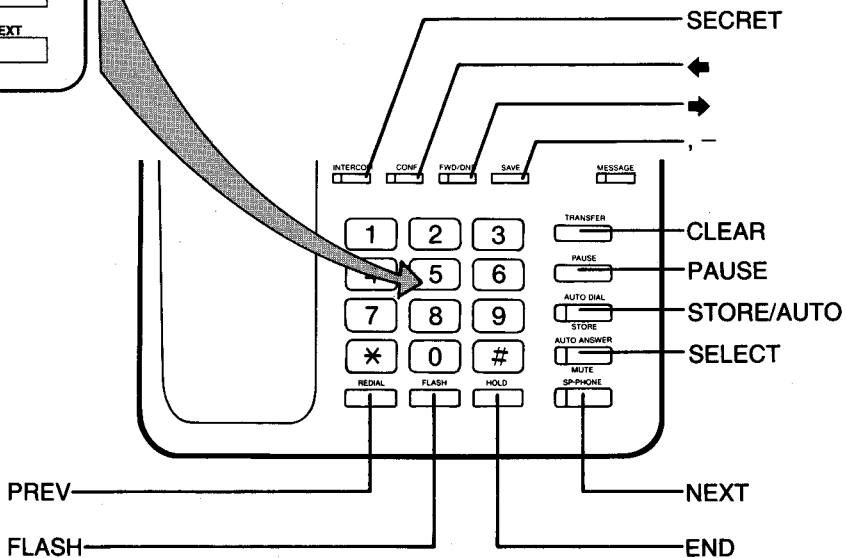

| TO SET | PROGRAM ADDRESS | STEPS REQUIRED TO CHANGE PROGRAM |
|---------------|------------------------|---|
|---------------|------------------------|---|

Flexible Day Ringing Assignment

[08] [NEXT] [C...E] [MEMORY] [END]
 ----- CO number
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|-------------------|-----------------------|-------------------------------|----|----|----|----|----|----|----|
| <i>Extensions</i> | <i>all extensions</i> | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| CO 1 | x | | | | | | | | |
| CO 2 | x | | | | | | | | |
| CO 3 | x | | | | | | | | |

Flexible Night Ringing Assignment

[09] [NEXT] [C...E] [MEMORY] [END]
 ----- CO number
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|-------------------|-----------------------|-------------------------------|----|----|----|----|----|----|----|
| <i>Extensions</i> | <i>all extensions</i> | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| CO 1 | x | | | | | | | | |
| CO 2 | x | | | | | | | | |
| CO 3 | x | | | | | | | | |

Toll Restriction—Class Assignment

[10] [NEXT] [SELECT] [MEMORY] [END]
 ----- CLASS 1/2/3
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|-------------------|-----------------------|-------------------------------|----|----|----|----|----|----|----|
| <i>Extensions</i> | <i>all extensions</i> | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Class 1 | x | | | | | | | | |
| Class 2 | | | | | | | | | |
| Class 3 | | | | | | | | | |

Toll Restriction—Denied Codes Assignment

[11] [NEXT] [C] [MEMORY] [END]
 ----- phone number with 7 digits
 -----until the desired memory location number appears

| | Memory location number | | | | |
|---------------------------|-------------------------------|----|----|----|----|
| | 00 | 01 | 02 | 03 | 04 |
| <i>Phone number entry</i> | | | | | |
| | 05 | 06 | 07 | 08 | 09 |
| | | | | | |
| | 10 | 11 | 12 | 13 | 14 |
| | | | | | |
| | 15 | 16 | 17 | 18 | 19 |

Toll Restriction—Exceptional Codes Assignment

[12] [NEXT] [C] [MEMORY] [END]
 ----- phone number with 7 digits
 -----until the desired memory location number appears

| | Memory location number | | | | |
|---------------------------|-------------------------------|----|----|----|----|
| | 00 | 01 | 02 | 03 | 04 |
| <i>Phone number entry</i> | | | | | |
| | 05 | 06 | 07 | 08 | 09 |
| | | | | | |
| | 10 | 11 | 12 | 13 | 14 |
| | | | | | |
| | 15 | 16 | 17 | 18 | 19 |

TO SET

PROGRAM ADDRESS

STEPS REQUIRED TO CHANGE PROGRAM

HOST PBX Access
Codes Assignment

[13]

[NEXT] [A...D] [MEMORY] [END]

-----Up to four outside access codes each with a maximum of 2 digits
-----until the desired CO numbers appears

| CO | Outside access codes of the host PBX | | | |
|----|--------------------------------------|--|--|--|
| 1 | | | | |
| 2 | | | | |
| 3 | | | | |

Automatic Answering
(Automatic/Manual)
Selection

[14]

[NEXT] [SELECT] [MEMORY] [END]

-----AUTO ANSWER/MAN ANSWER
-----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Automatic | x | | | | | | | | |
| Manual | | | | | | | | | |

Preferred Line
Assignment

[15]

[NEXT] [SELECT] [MEMORY] [END]

-----..... (none)/CO 1/CO 2/CO 3
-----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|----------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| • • • • (none) | x | | | | | | | | |
| CO 1 | | | | | | | | | |
| CO 2 | | | | | | | | | |
| CO 3 | | | | | | | | | |

Programmable Call
Waiting

[16]

[NEXT] [SELECT] [MEMORY] [END]

-----ENABLE/DISABLE
-----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Disable | x | | | | | | | | |
| Enable | | | | | | | | | |

Duration Time Count
Start Mode

[17]

[SELECT] [MEMORY] [END]

-----INSTANTLY/5S AFTER DIAL/10S AFTER DIAL

| | Default | To make program change | | |
|----------------|---------|------------------------|--|--|
| Instantly | | | | |
| 5S after dial | x | | | |
| 10S after dial | | | | |

Hookswitch Flash Timing

[18]

[NEXT] [SELECT] [MEMORY] [END]

-----300 MS/600 MX/900 MS
-----until the desired extension number appears

| | Default | To make program change | | |
|----------|----------|------------------------|---|---|
| CO (s) | all CO's | 1 | 2 | 3 |
| 300 msec | | | | |
| 600 msec | x | | | |
| 900 msec | | | | |

Disconnect Time

[19]

[NEXT] [SELECT] [MEMORY] [END]

-----1.5 SEC/4.0 SEC
-----until the desired CO number appears

| | Default | To make program change | | |
|---------|----------|------------------------|---|---|
| CO (s) | all CO's | 1 | 2 | 3 |
| 1.5 sec | x | | | |
| 4.0 sec | | | | |

| TO SET | PROGRAM ADDRESS | STEPS REQUIRED TO CHANGE PROGRAM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------------|--|-----------|------------|------------------------|-----------|---------------|-----------|-----------|---------|---------|---|------------|----------------|---------|----|----|---------|------------------------|----|----|----|----------------|---|--|--|--|--|--|--|--|--|----------------|---|--|--|--|--|--|--|--|--|------------------|--|--|--|--|--|--|--|--|--|
| Calling Party Control (CPC) Signal | [20] | <p>[NEXT] [SELECT] [MEMORY] [END] ----- TONE CALL/VOICE CALL -----until the desired CO number appears</p> <table border="1" data-bbox="443 182 1202 295"> <thead> <tr> <th></th> <th>Default</th> <th colspan="3">To make program change</th> </tr> <tr> <td>CO (s)</td> <td>all CO's</td> <td>1</td> <td>2</td> <td>3</td> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | | CO (s) | all CO's | 1 | 2 | 3 | Enable | × | | | | Disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CO (s) | all CO's | 1 | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Enable | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Intercom Alerting Mode | [21] | <p>[NEXT] [SELECT] [MEMORY] [END] ----- TONE CALL/VOICE CALL -----until the desired extension number appears</p> <table border="1" data-bbox="443 399 1202 512"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Tone call</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Voice call</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | | | | | | | Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | Tone call | × | | | | | | | | | Voice call | | | | | | | | | | | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tone call | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Voice call | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Programmable Doorphone | [22] | <p>[NEXT] [SELECT] [MEMORY] [END] -----D-PHONE 1, 2/1/2/... (deny the ringing) -----until the desired extension number appears</p> <table border="1" data-bbox="443 607 1202 746"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Doorphone 1</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Doorphone 2</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>deny the ringing</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | | | | | | | Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | Doorphone 1 | × | | | | | | | | | Doorphone 2 | × | | | | | | | | | deny the ringing | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Doorphone 1 | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Doorphone 2 | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| deny the ringing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dial Call Pickup Group Assignment | [23] | <p>[NEXT] [SELECT] [MEMORY] [END] ----- PICKUP-G:1/2/1, 2/... (out of the group) -----until the desired extension number appears</p> <table border="1" data-bbox="443 850 1202 980"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Pickup Group 1</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Pickup Group 2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>out of the group</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | | | | | | | Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | Pickup Group 1 | × | | | | | | | | | Pickup Group 2 | | | | | | | | | | out of the group | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pickup Group 1 | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pickup Group 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| out of the group | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Busy Tone Selection | [24] | <p>[SELECT] [MEMORY] [END] ----- TONE 1/2</p> <table border="1" data-bbox="443 1058 1202 1137"> <thead> <tr> <th></th> <th>Default</th> <th colspan="3">To make program change</th> </tr> <tr> <td>Tone 1</td> <td>×</td> <td></td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td>Tone 2</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | | Tone 1 | × | | | | Tone 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tone 1 | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tone 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Hold Recall Time Set | [26] | <p>[SELECT] [MEMORY] [END] ----- 30SEC/1 MIN/2 MIN/3 MIN/4 MIN/5 MIN/DISABLE</p> <table border="1" data-bbox="443 1223 1202 1319"> <thead> <tr> <th></th> <th>30 seconds</th> <th>1 minute</th> <th>2 minutes</th> <th>3 minutes</th> <th>4 minutes</th> <th>5 minutes</th> <th>disable</th> </tr> </thead> <tbody> <tr> <td>Default</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>To make program change</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | 30 seconds | 1 minute | 2 minutes | 3 minutes | 4 minutes | 5 minutes | disable | Default | | | | | | | | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 30 seconds | 1 minute | 2 minutes | 3 minutes | 4 minutes | 5 minutes | disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Default | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Programmable External Paging Access Tone | [27] | <p>[SELECT] [MEMORY] [END] ----- ENABLE/DISABLE</p> <table border="1" data-bbox="443 1406 1202 1475"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | Enable | × | | | Disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Enable | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DTMF Receiver Check | [28] | <p>[NEXT][SELECT][MEMORY][END] ----- ENABLE/DISABLE -----until the desired DTMF receiver appears</p> <table border="1" data-bbox="443 1588 1202 1692"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> <tr> <td>DTMF receiver</td> <td>1, 2</td> <td>1</td> <td>2</td> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | Default | To make program change | | DTMF receiver | 1, 2 | 1 | 2 | Enable | × | | | Disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Default | To make program change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DTMF receiver | 1, 2 | 1 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Enable | × | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Disable | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TO SET **PROGRAM ADDRESS** **STEPS REQUIRED TO CHANGE PROGRAM**

Programmable Secret Auto Dial

[29]

[SELECT] [MEMORY] [END]
 -----NO SECRET/SECRET

| | Default | To make program change | | | | | | | |
|-----------|---------|------------------------|--|--|--|--|--|--|--|
| No secret | x | | | | | | | | |
| Secret | | | | | | | | | |

Transfer Recall Time

[30]

[SELECT] [MEMORY] [END]
 -----30 SEC/2 MIN

| | Default | To make program change | | | | | | | |
|--------|---------|------------------------|--|--|--|--|--|--|--|
| 30 sec | x | | | | | | | | |
| 2 min | | | | | | | | | |

Automatic Designated CO Line Access

[31]

[NEXT] [C...E] [MEMORY] [END]
 -----CO number
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| CO 1 | x | | | | | | | | |
| CO 2 | x | | | | | | | | |
| CO 3 | x | | | | | | | | |

Programmable Call Waiting Tone

[32]

[NEXT] [SELECT] [MEMORY] [END]
 -----TONE 1/TONE 2
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Tone 1 | x | | | | | | | | |
| Tone 2 | | | | | | | | | |

Programmable Executive Override

[33]

[NEXT] [SELECT] [MEMORY] [END]
 -----ENABLE/DISABLE
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Enable | | | | | | | | | |
| Disable | x | | | | | | | | |

Standard Telephone Connection with Proprietary Telephone

[34]

[NEXT] [SELECT] [MEMORY] [END]
 -----ENABLE/DISABLE
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Enable | | | | | | | | | |
| Disable | x | | | | | | | | |

FI/SAVE Selection (for KX-T30850, KX-T7020, KX-T7030, KX-T7050)

[35]

[NEXT] [SELECT] [MEMORY] [END]
 -----FEATURE KEY/SAVE KEY
 -----until the desired extension number appears

| | Default | To make program change | | | | | | | |
|-------------|----------------|------------------------|----|----|----|----|----|----|----|
| Extensions | all extensions | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| Feature Key | x | | | | | | | | |
| Save Key | | | | | | | | | |

Selectable Call-on-Hold Music Source

[36]

[SELECT] [MEMORY] [END]
 -----INTERNAL/EXTERNAL

| | Default | To make program change | | | | | | | |
|----------|---------|------------------------|--|--|--|--|--|--|--|
| Internal | x | | | | | | | | |
| External | | | | | | | | | |

Station Program Clear

[98]

[NEXT] [MEMORY] [END]

System Clear

[99]

[NEXT] [MEMORY] [END]